


Changing StarFire Frequency on GreenStar 2/3 Displays




Step 1: Push the “Menu” button




Step 2: Select the StarFire Receiver button

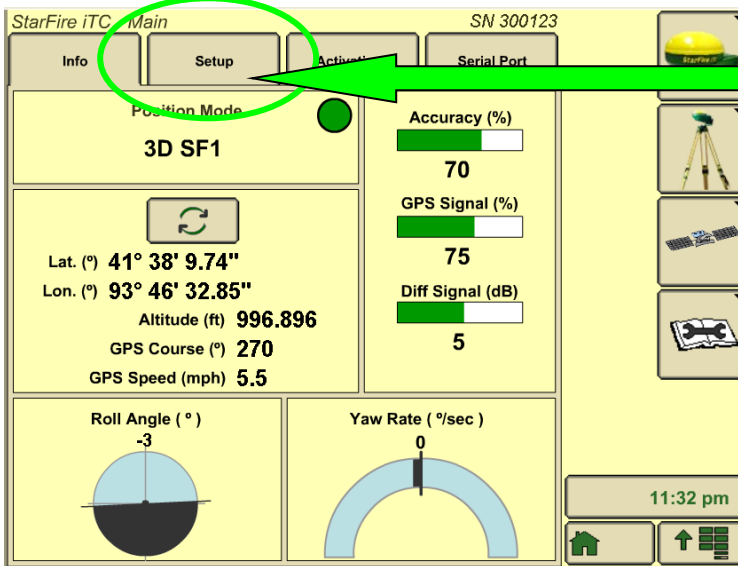


Step 3: Select the “Setup” tab

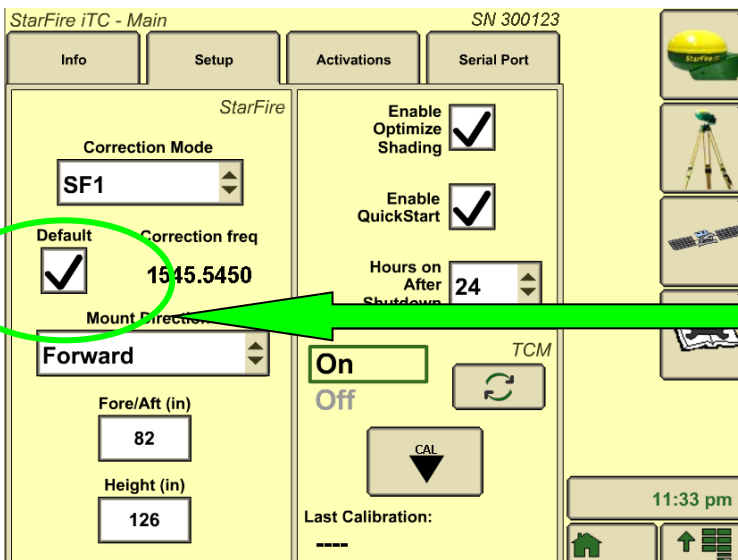


Step 4: If checked, uncheck the “Default” check box.

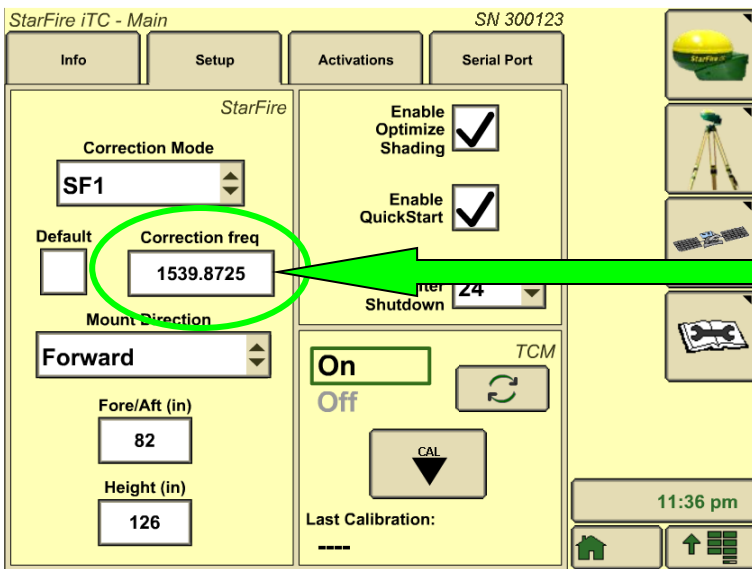

Step 5: Select the “Correction freq” box.

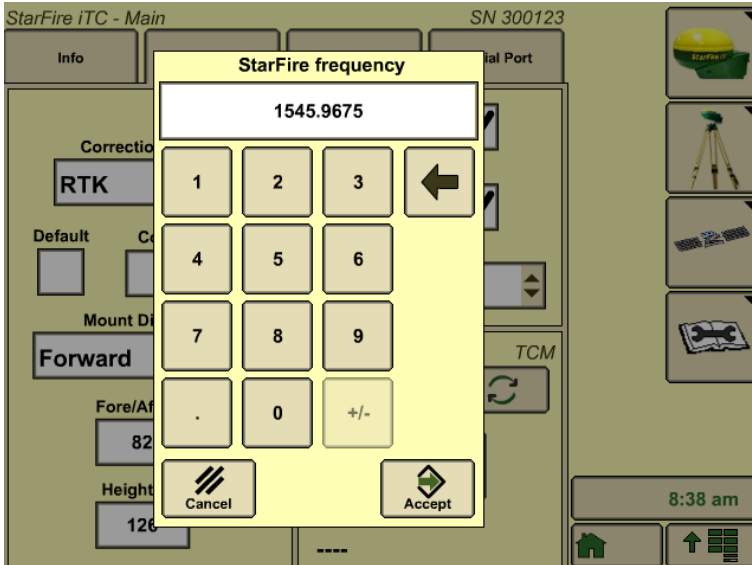

Step 6: Enter StarFire Frequency “1545.9675” and press the Accept button.

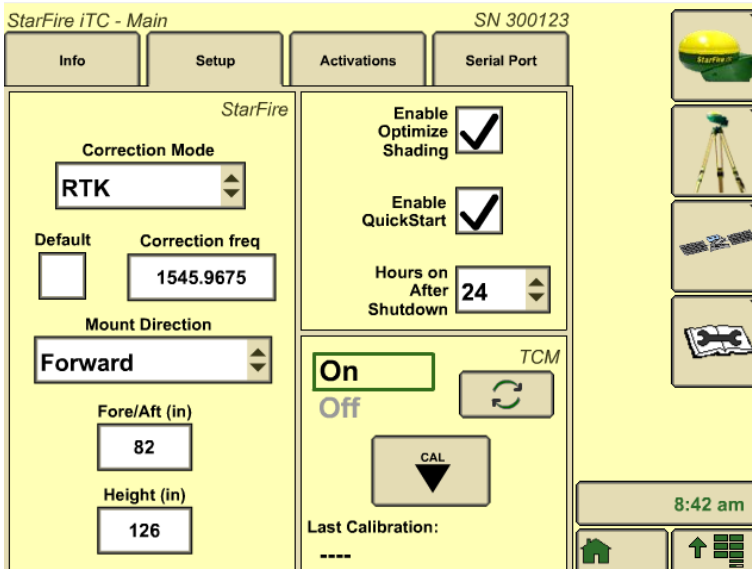

Step 7: After the final changes the screen should match the picture on the left.



Finally, select the “Home” button. GPS should be ready to go!